

# Nordic Brick SITE LIGHTING

Designed for construction sites with Plug & Play for temporary installations

The popular range installed in hundreds of construction sites, for temporary installations and rough environments. The Nordic Brick is the latest design with advanced optics and perfect control of the light. Easy quick connectors and versatile for installations.



- 

lm  
21,100-  
86,800
- 

Dark Sky Optics
- 

Dimmable
- 

Smart Control
- 

IP66
- 

IK08
- 

Resistant  
Coating
- 

Plug & Play
- 

Lightweight  
& Compact

**lm**  
21,100-  
126,600



### Brilliant Light

- Lins technology reduces glare, choose between narrow or wide beam angles
- High lumen output with >160lm/W
- Easy to change between symmetric optic solutions



### Lightweight

- Small and robust light system

### BUILT TOUGH



- Robust & Resilient construction.

### Light Control

- Designed for easy integration with light control solutions



### Versatile mounting

- Sturdy and vibration resistant bracket



### PERFORMANCE



- IP67 Plug & Play connectors
- Panel connector for power out to next fixture
- Panel connector for dimming prepared for light control



### Retrofit light towers

- Designed for easy replacing of metal halid lights of light towers



## BRILLIANT LIGHT DISTRIBUTION

Easy to change optics and efficient light distribution with >160lm/W

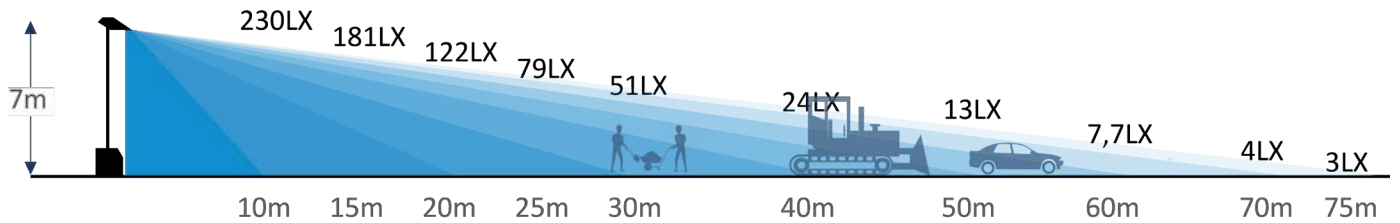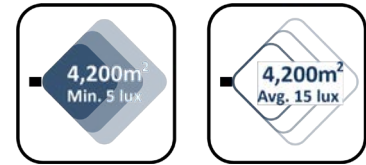

Symbols indicate lux requirements for different construction tasks

## TECH SPEC



	MFL 130	MFL 240	MFL 300
Article no:	MFL 130	MFL 240	MFL 300
Light output	21 100lm	38 400lm	52 100lm
System power	135W	240W	320W
Lumen/w	156lm/w	160lm/w	162lm/w
Input voltage	100-305VAC/50Hz	100-305VAC/50Hz	100-305VAC/50Hz
Dimmable	Yes	Yes	Yes
Lifetime (L80, B50)	100 000H	100 000H	100 000H
Color temperature	3/4/6000K	3/4/6000K	3/4/6000K
CRI	>70/ >80	>70/ >80	>70/ >80
Angle beam	9 optics options	9 optics options	9 optics options
IP class	IP66	IP66	IP66
IK class	IK08	IK08	IK08
Ambient temperature	-40 - +45	-40 - +45	-40 - +45
Incoming cable	5m H07RNF with quick connectors	5m H07RNF with quick connectors	5m H07RNF with quick connectors
Material	Aluminium/PC	Aluminium/PC	Aluminium/PC
Weight	4 kg	6,4 kg	9,6 kg
Dimensions (L x W x H mm):	188 x 314 x 182	381 x 122 x 259	381 x 122 x 369